



# Slam Dunk™

## Water-Based Urethane Wood Floor Finish

- Single-component formula means no pot life and no mess. Finish is useable the next day if more coats are desired.
- Contains reactive polymers that offer durability and appearance equal too or greater than oil-modified products.
- Excellent black mark, scuff and soil resistance.
- One hour dry time between coats under normal conditions.
- Only 24 hours gym down time.
- Uniquely restorable with a high speed buffer.
- Suitable for oak, maple and parquet floors.
- MFMA approved - meets all standards set for group five products, water-based finishes.

### General Directions


This finish is not designed for application to bare wood floors. Use it only on previously sealed floors.

Before recoating, test floors which were previously coated with another finish by coating an inconspicuous area to determine compatibility with the existing finish. Apply 2 or 3 coats of finish to the test area following the instructions below.

1. **Prepare the Floor:** Dust mop the floor and remove all chewing gum, tape and labels.
2. **Scrub the Floor:** Clean the floor with an 8 ounce per gallon dilution of Clean Pass™. Auto scrub the floor with a black pad to roughen the surface. Rinse the floor with Ultra-Gloss™ Neutral Cleaner until all residue has been removed.
3. **Apply the Finish:** Stir gently before using. Apply at a rate of 800-1,000 square feet per gallon, using a clean, synthetic applicator on the drag tool. Apply thin, even coats in the direction of the grain of the wood. Allow a drying time of at least 1 hour between coats. Humid conditions will necessitate longer drying times. After the first

coat has dried completely, apply a second coat. Apply the second coat within 4 hours of the time the first coat was dry.

4. **Daily Maintenance:** Dust mop at least daily, or more often as required, to keep the floor dust and dirt free. Damp mop to remove spills, salt residue, etc. with Ultra-Gloss™ Neutral Cleaner and a thoroughly wrung mop.
5. **Weekly Maintenance:** If soil conditions are heavy, auto-scrub weekly with red pads and a 2 ounce per gallon dilution of Ultra-Gloss Neutral Cleaner.
6. **Restoring the Floor:** Dust mop the floor. Auto-scrub with red pads with a 4-8 ounces per gallon dilution of Clean Pass. Dry burnish the floor with a recommended burnish pad.

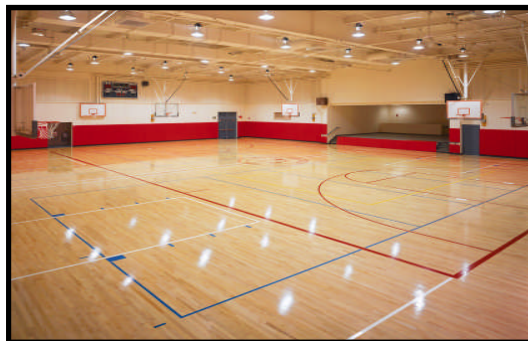

## Application Tips

1. Slam Dunk™ should be gently mixed before application.
2. During application, make sure air handlers are OFF and doors are closed to prevent flash drying. Ventilation can be turned back on after the application is complete and the finish has skinned over.
3. Slam Dunk™ can be applied over most existing finishes including oil-modified urethane products. If you are uncertain, test for compatibility in a small, inconspicuous area first.
4. When the humidity is high, drying times for Slam Dunk™ will vary greatly. Do not apply a second coat if the first coat is still tacky.
5. Two coats are usually sufficient when recoating a floor. If a third coat is desired, make sure the previous coats are thoroughly dry before applying the product.

## Properties

- **Type** - Urethane/Acrylic Blend
- **Form** - Opaque Liquid
- **Odor** - Bland
- **Color** - Light Yellow
- **Weight per Gallon** - 8.6 pounds
- **pH** - 7.5-8.5
- **Floor Solids** - 29%
- **Coverage** - Up to 1000 Sq. Ft. per gallon (25 m<sup>2</sup> per liter)
- **Slip-Resistance** - UL Classified
- **VOC Content** - 250 grams/liter

